



NOTE:  
 1.INSULATOR:HIGH-TEMP THERMOPLASTIC UL94V-0  
 COLOR: BLACK  
 2.CONTACT: COPPER ALLOY  
 PLATING: TIN OR GOLD FLASH OVERALL NICKEL UNDER PLATED  
 3.FITTING NAIL: COPPER ALLOY  
 PLATING: MATTE-TIN PLATED  
 ORDER INFORMATION: 4251K-X XX N - 00,20,30,40 X



ENTRY INDUSTRIAL CO., LTD.  
 OCT - 2 2013  
 R&D D.C.C. ISSUED





PACKING: R: PLASTIC REEL  
 E: TUBE  
 L: PAPER REEL

TYPE: 00: STANDARD  
 20: CARRIER REVERSE Δ  
 Δ30: CARRIER WIDTH DIFFERENT  
 Δ40: PITCH DIFFERENT


PIN  
 E: TIN  
 Q: MATTE-TIN  
 F: CONTACT GOLD  
 FITTING NAIL TIN

Δ4251K: 0.6 WTB SMT R/A TYPE SINGLE ROW  
 (HALOGEN FREE)

PIN NO.	A	B	C
2	3.00	1.36	0.60
3	3.60	1.96	1.20
4	4.20	2.56	1.80
5	4.80	3.16	2.40
6	5.40	3.76	3.00
7	6.00	4.36	3.60
8	6.60	4.96	4.20
9	7.20	5.56	4.80
10	7.80	6.16	5.40
11	8.40	6.76	6.00
12	9.00	7.36	6.60
13	9.60	7.96	7.20
14	10.20	8.56	7.80
15	10.80	9.16	8.40
16	11.40	9.76	9.00
17	12.00	10.36	9.60
18	12.60	10.96	10.20
19	13.20	11.56	10.80
20	13.80	12.16	11.40

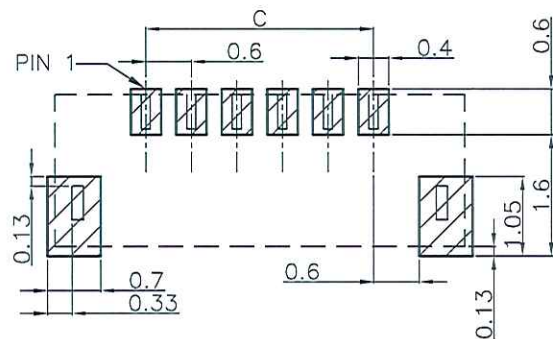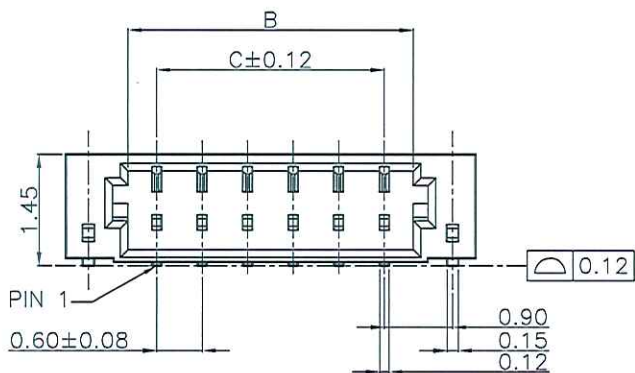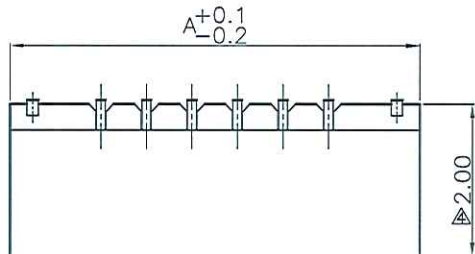

RECOMMENDED PCB LAYOUT

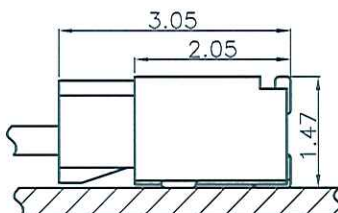

ASSEMBLY LAYOUT

CUSTOMER  
 E&T 恩得利工業股份有限公司  
 ENTRY INDUSTRIAL CO., LTD.

SER	REVISIONS	CHK	DATE
Δ	RE201309005	Juno	09/09/13
Δ	REN130514	Juno	05/24/13
Δ	RE201302018	Juno	05/02/13
Δ	RE201209023	KAZ	10/30/12
Δ	REN091009	HUNTER	10/22/09

GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED  
 X.X ±0.25  
 X.XX ±0.15  
 X.XXX ±0.1  
 ANG. ±2°

DRAWN Hunter SEP-11-2009  
 CHECKED  
 APPROVED 9/9/13  
 SHEET 1/1

PART NO. ΔΔΔ  
 4251K-XXXN-00,20,30,40X  
 TITLE:  
 Δ 0.6 WTB SMT R/A TYPE SINGLE ROW  
 UNIT MM SCALE 10:1 SIZE A4 REV F