


RECOMMEND PCB LAYOUT
PCB TOLERANCE: ±0.05


CONN. OUTLINE

NOTES: MATERIAL & FINISH
1. HOUSING: HIGH-TEMP THERMOPLASTIC, UL94V-0
2. CONTACT: COPPER ALLOY
3. PLATING: CONTACT AREA 30u" GOLD AND SOLDER
AREA MATTE-TIN(LEAD FREE) OVERALL NICKEL UNDER PLATED
ORDER INFORMATION: 8651K - X 13 N - 04 X


PACKING:
R: PLASTIC REEL
L: PAPER REEL
E: TUBE
TYPE
PIN NO.
S: CONTACT AREA 30u" GOLD FLASH
SOLDER AREA MATTE-TIN(LEAD FREE)
HALOGEN FREE





ENTERY INDUSTRIAL CO., LTD.
FEB 10. 2014
R&D D.C.C. ISSUED



SECTION A-A

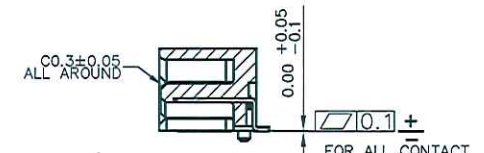

SECTION C-C



SECTION B-B

CUSTOMER		恩得利工業股份有限公司 ENTERY INDUSTRIAL CO., LTD.	
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN <i>Max</i> MAR-11-2011	PART NO. 8651K-S13N-04X	
X.X ±0.25	CHECKED	TITLE: SLIM SATA 7+6P PLUG R/A SMT TYPE	
X.XX ±0.13	APPROVED <i>[Signature]</i> 2/7/10	SHEET 1/1	
X.XXX ±0.13	ANG. ±0'30'	UNIT	SCALE
		MM	2:1
		SIZE	A4
		REV	D

RE201401019	Juno	02/05/14
RE201104011	KAZ	04/27/11
SER	REVISIONS	CHK DATE